



HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

XF2 Series IC Counterbalanced Trucks

with capacity of 1,500 to 3,500kg

STAGE V
CERTIFIED



The World of Hangcha
SINCE 1956



FOR HIGH PERFORMANCE DURING WORKING



Appearance

A vivid and sturdy exterior inheriting the classic design, embodying innovative ideas, and bringing a strong high-tech impact.



Safe

- / The vehicle has a low center of gravity design and optimized operating vision. (small counterweight design, backward tilting counterweight design, optimized triplex mast design).
- / OPS system is provided for the standard configuration and optionally an adjustable speed limit range of several segments is provided.



Mast

Can be easily installed with J-hooks through a simple process.





***MORE VISION
MORE CONTROL
MORE GUARANTEE***

All-round visibility

Optimized design provides outstanding visibility in all directions.

COMFORTABLE


- / The fully-suspended gearbox, fully-suspended overhead guard, and fully-suspended seat realize three-stage vibration reduction to reduce vibration of the vehicle.
- / Noise control: Special sound-absorbing cotton is attached to certain parts and so on to decrease the vehicle's noise.
- / Optimized ergonomic design, enlarged cab space, an optional new-generation fingertip operating system.



The fully-suspended gearbox



Fully-suspended overhead guard

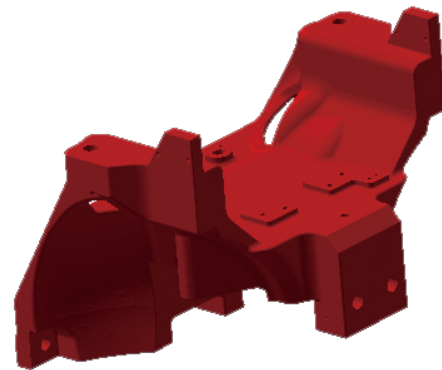

Cast steering axle mounts

Truck Construction


With the novel designed cast steering axle mounts, the center of gravity is lowered, and the vehicle's noise radiation is reduced. An integrated fully-suspended overhead guard is provided for the standard configuration, and customers can choose cab. Large plate stamping and molding processes and automatic welding technology are used to enable a stylish exterior.

Control system

- / Breaking through the limitation of the traditional steering axle structure, the newly developed cast open steering axle has the maximum internal turning angle increased from 77° to 82°, it can help customers work in narrow space.
- / With the cast open steering axle, the oil cylinder can be replaced easily, and the vehicle has a low center of gravity and good stability.
- / The steering axle is installed with pads, which effectively improve the operation comfort and reliability.
- / Parking brake: A central brake requiring less operating force.



An optional pedal parking brake

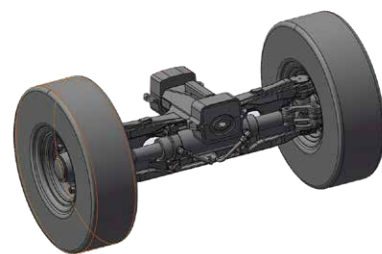


Cast steering axle



Optional hydrostatic transmission system


- / In this system, the engine drives a hydraulic pump and the pressure is transferred to a hydraulic motor mounted on the drive axle, then the motor outputs traction to the drive wheels via a gear reducer and a differential.
- / As this system has no clutch to be used by the hydraulic transmission forklift truck, it does not cause heat loss and wear from inching operation, minimizing transmission losses and reducing fuel consumption.
- / The hydrostatic drive system will automatically brake when the accelerator is released, leading to less wear and tear on the brake and tyres, and longer service life.
- / Equipped with the adjustable speed setting and turning deceleration function, driving safety can be ensured from all aspects.
- / Three operating modes [E, N, S] are freely selectable, providing simple and precise control and allowing optimal working efficiency in a wide range of operating conditions.

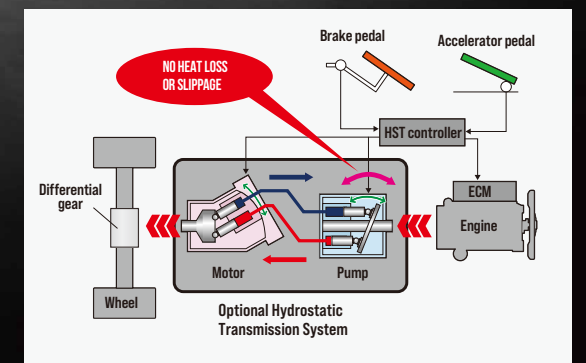

THE POWER TO PERFORM

Reliable

- / A wet axle is developed and used to significantly improve the reliability of the braking system and force transmission structural parts. (Wet brake, custom high-strength bolts, wheel side planetary reducer).
- / Wet brake drive axle + enhanced SHAOCHI/ OKAMURA enhanced gearbox. Both the drive axle and the gearbox are expected to have a service life of far longer than 10 years, and the wet brake 10 years. Enhanced four-piece rims are used.

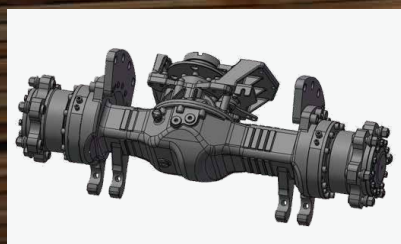

Wet brake drive axle

Hydraulic

A high-pressure hydraulic system and load-sensing steering-priority-ensured multiway valves are used to improve system efficiency. A low-noise Shimadzu gear pump can improve reliability and reduce noise. All joints are 24° conic joints and each high-pressure pipe joint has a pressure measuring port, to enable better sealing and maintainability.

E SERIES engines and an enhanced gearbox are developed and used to significantly improve the reliability of the power train. (E series engines match the enhanced F gearbox and new Okamura gearbox).



High Power



Heat Dissipation

Power

- / The highly cost-effective Xinchai 3E22 diesel engine meets EU V emission requirements.
- / The engine has been tested for 10000h in total for reliability validation in several round, the reliability has been fully verified. It is worth mentioning that the diesel engine has been tested in Jinan testing center and Bosch Wuxi test bench for 3000h. The diesel engine has excellent reliability, and is rated as Bosch off-road project 'BES' award.
- / A plate-fin heat dissipater with less air resistance is developed, which has a heat dissipation efficiency increased by 15%.



0.44%

Very low dilution ratio of engine oil, the oil dilution ratio after single regeneration is only 0.44%, much lower than the value of 20% specified in the national standard, the oil change interval of E series diesel engine up to 500h.



5,000h

DPF has a long maintenance interval, Based on excellent engine raw emission level and regeneration strategy, the ash cleaning interval up to 5000h.



DPF



E series engine

FULLY AUTOMATED

Electrical system

- / Streamer LED taillights are developed and used to make the vehicle more ethereal with a strong high-tech impact.
- / The new-generation high-efficiency energy-saving novel combination LED lighting system is energy-saving, while the performance and service life of the lights are significantly improved.
- / In order to improve the protection level, all key connectors and connectors are all waterproof.



Streamer LED taillights

Intelligent

- / Interactive instruments are provided for the standard configuration, to display the operating status of the vehicle, and realize the information interaction of the vehicle.
- / An intelligent controller can realize the functions of OPS system, and flameout for idle speed time out, and can have other optional functions of speed control, speed limiting for faults, lifting at a high idle speed, automatic fork leveling, etc.



New interactive instruments



Standards

Truck	Transmission	Steering	Power	Body
/ High-performance tire / Fully-suspended seat	/ Wet braking drive axle / Fully-suspended gearbox / Oil filter / Oil cooler / Four-piece rim / Electro-hydraulic steering / Gearbox dipstick	/ Open cast steering axle / Pad-equipped steering axle / Fully hydraulic power steering gear / Small-diameter steering wheel / Steering wheel adjusting device	/ EU V engine / Plate-fin heat dissipater / Auxiliary water tank for heat dissipater / High-efficiency air filter / Safety filter cartridge / High-efficiency air intake silencer / High-efficiency exhaust silencer / High-position air intake device / Low-position exhauster / Fan protection device / Engine operation safety protection / DPF system	/ Special sound-absorbing cotton / Traction device / Engine hood gas spring / Anti-skid boarding step / Large rubber pedal pad / Counterweight grille cover / Lockable hood / Double-layer soundproof hood padding / Water tank lid bolt with retaining ring / Piston rod sleeve / Traction pin locking pin

Control	Hydraulic	Electrical	Portal	Overhead Guard
/ Cable-type stop brake (with safety lock) / Hanging control pedal	/ Low-noise gear pump / Load-sensing steering-priority-ensured multiway valve / 24° conic joint / High-pressure hydraulic system / Hydraulic oil recycling filter cartridge / Self-locking valve in the tilting fuel circuit / Hydraulic dipstick / Double valve / Hydraulic oil suction filter cartridge	/ Multifunctional interactive instruments / Chair sensing system / Combination LED lighting system / Intelligent controller / Gear shifting switch formed by in-mold injection / Waterproof connector / Electric horn / Reverse buzzer / Integrated combination switch / Neutral gear safety switch / Engine oil pressure alarm / Gearbox oil temperature alarm / Engine hour counter / Oil gauge / Water temperature meter / Preheating indicator / Charge indicator / Main power switch / Electronic alarm light	/ Duplex wide-view large-lifting-capacity mast / Standard fork / Standard fork carriage / Standard load backrest / Speed limiting valve of the mast / Load safety valve / Mast descending buffering device	/ Fully-suspended overhead guard / Boarding handle / Right rear armrest with horn button / PVC ceiling / Wide-view rearview mirror

Options

Truck	Power	Hydraulic	Electrical	Portal
/ New-generation fingertip operating system / Combined cab / Cab heater / Windshield and wiper / User specified color / Solid tire / Clean tire / Swinging LPG cylinder stand / Buckling LPG cylinder stand / Fan / License plate frame / Labels in foreign languages / Vehicle toolkit	/ Water tank grille cover / Basin-shaped double air filter / High-position exhauster / High-position exhaust fire protection device	/ Hydraulic oil heat dissipater / Electric proportional control valve / Triple valve / Quadruple valve / Quintuple valve	/ Multi-segment adjustable speed limit / Battery for start in cold weather / Lifting at a high idle speed / Oil-water separation alarm / Acoustic and optical alarm light / Start with a PIN code or by swiping a card / Rear lamp / Blue light	/ Free duplex wide-view mast / Four-cylinder free triplex wide-view mast / Free triplex wide-view mast / Special fork / Widened fork carriage / Heightened load backrest

Transmission	Steering	Body	Overhead Guard	Control
/ Double front wheels	/ Synchronous steering	/ Rotating handle of water tank lid / Fuel tank cap with lock	/ Heightened overhead guard / Additional left and right rearview mirrors / Fire extinguisher (1kg)	/ Pedal parking brake

Optional Attachments

/ Paper roll clamp / Rotatable roll clamp / Load stabilizer / Multi-purpose barrel clamp / Soft package clamp	/ Oil barrel clamp / Tipping clamp / Boom / Tie rod / Side shift fork	/ Rotating fork / Lengthened fork sleeve / Load ejector / Cardboard box clamp / Push-puller	/ Bucket / Hook / Lengthened fork / Weighing system
---	---	---	---

1.5-1.75t XF2 series mast:(pneumatic)

Type	Model	Max. Fork Height	Overall height				Free lift		Front Overhang		Tilt range		Capacity				
			Lowered	Extended		Without backrest	With backrest	Without backrest	With backrest	1.5t	1.75t	FWD	BWD	load capacity at 500mm			
				Without backrest	With backrest									Single tire		Dual tire	
														1.5t	1.75t	1.5t	1.75t
Wide view mast		mm	mm	mm	mm	mm	mm	mm	mm	(°)	(°)	kg	kg	kg	kg		
	X2B15M200	2000	1495	2548	2968	155	155	405	410	6	6	1500	1750	1500	1750		
	X2B15M250	2500	1745	3048	3468	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M270	2700	1845	3248	3668	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M300	3000	1995	3548	3968	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M330	3300	2145	3848	4258	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M350	3500	2245	4048	4458	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M360	3600	2345	4148	4558	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M370	3700	2395	4248	4658	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M400	4000	2595	4548	4958	155	155	405	410	6	11	1500	1750	1500	1750		
	X2B15M430	4300	2745	4848	5258	155	155	405	410	6	6	1500	1700	1500	1700		
	X2B15M450	4500	2845	5048	5458	155	155	405	410	6	6	1500	1650	1500	1650		
	X2B15M470	4700	2945	5248	5658	155	155	405	410	6	6	1450	1600	1450	1600		
	X2B15M480	4800	2995	5348	5758	155	155	405	410	6	6	1350	1600	1400	1600		
	X2B15M500	5000	3095	5548	5958	155	155	405	410	6	6	1300	1550	1350	1550		
	Wide view full duplex mast	X2B15M550	5500	3345	6048	6458	155	155	405	410	3	6	/	/	1300	1450	
X2B15M600		6000	3595	6548	6958	155	155	405	410	3	6	/	/	1100	1250		
X2B15U200		2000	1495	2570	2945	921	550	417	422	6	6	1500	1750	1500	1750		
X2B15U250		2500	1745	3070	3445	1171	800	417	422	6	11	1500	1750	1500	1750		
X2B15U270		2700	1845	3270	3645	1271	900	417	422	6	11	1500	1750	1500	1750		
X2B15U300		3000	1995	3570	3945	1421	1050	417	422	6	11	1500	1750	1500	1750		
X2B15U330		3300	2145	3870	4245	1571	1200	417	422	6	11	1500	1750	1500	1750		
X2B15U350		3500	2245	4070	4445	1671	1300	417	422	6	11	1500	1750	1500	1750		
X2B15U360		3600	2345	4170	4545	1771	1400	417	422	6	11	1500	1750	1500	1750		
X2B15U370		3700	2395	4270	4645	1821	1450	417	422	6	11	1500	1750	1500	1750		
X2B15U400		4000	2595	4570	4945	2021	1650	417	422	6	11	1500	1750	1500	1750		
X2B15N400		4000	1945	4584	4955	1371	1000	413	418	6	6	1450	1650	1450	1650		
X2B15N430		4300	2045	4684	5255	1471	1100	413	418	6	6	1450	1600	1450	1600		
X2B15N450		4500	2095	5084	5455	1521	1150	413	418	6	6	1400	1550	1400	1550		
X2B15N470		4700	2195	5284	5655	1621	1250	413	418	6	6	1350	1500	1350	1500		
Wide view full triplex mast		X2B15N480	4800	2195	5384	5755	1621	1250	413	418	6	6	1300	1450	1350	1450	
	X2B15N500	5000	2295	5584	5955	1721	1350	413	418	6	6	1250	1450	1300	1450		
	X2B15N550	5500	2445	6084	6455	1871	1500	413	418	3	6	950	1100	1150	1400		
	X2B15N600	6000	2645	6584	6955	2071	1700	413	418	3	6	700	850	1050	1200		
	X2B15N650	6500	2845	7084	7455	2271	1900	413	418	3	6	/	/	800	900		
	X2B15N700	7000	3095	7605	7955	2500	2150	413	418	3	6	/	/	550	650		

With sideshifter minus 150kg,with integral sideshifter minus 100kg.

2.0-2.5t XF2 series mast:(pneumatic)

Type	Model	Max. Fork Height	Overall height			Free lift		Front Overhang	Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest		FWD	BWD	load capacity at 500mm			
				Without backrest	With backrest						Single tire		Dual tire	
											2.0t	2.5t	2.0t	2.5t
Wide view mast		mm	mm	mm	mm	mm	mm	mm	(°)	(°)	kg	kg	kg	kg
	X2B25M200	2000	1515	2642	3046	140	140	462.5	6	6	2000	2500	2000	2500
	X2B25M250	2500	1765	3142	3546	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M270	2700	1865	3342	3746	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M300	3000	2015	3642	4046	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M330	3300	2165	3942	4346	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M350	3500	2265	4142	4546	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M370	3700	2415	4342	4746	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M400	4000	2615	4642	5046	140	140	462.5	6	11	2000	2500	2000	2500
	X2B25M430	4300	2765	4942	5346	140	140	462.5	6	6	2000	2400	2000	2500
	X2B25M450	4500	2865	5142	5546	140	140	462.5	6	6	1950	2300	1950	2450
	X2B25M470	4700	2965	5342	5746	140	140	462.5	6	6	1900	2250	1900	2400
	X2B25M500	5000	3115	5642	6046	140	140	462.5	6	6	1850	1900	1850	2400
	X2B25M550	5500	3365	6142	6546	140	140	462.5	3	6	/	/	1800	2300
X2B25M600	6000	3615	6642	7046	140	140	462.5	3	6	/	/	1600	1750	
Wide view full free duplex mast	X2B25U200	2000	1515	2671	3056	854	469	462.5	6	6	2000	2500	2000	2500
	X2B25U250	2500	1765	3171	3556	1104	719	462.5	6	11	2000	2500	2000	2500
	X2B25U270	2700	1865	3371	3756	1204	819	462.5	6	11	2000	2500	2000	2500
	X2B25U300	3000	2015	3671	4056	1354	969	462.5	6	11	2000	2500	2000	2500
	X2B25U330	3300	2165	3971	4356	1504	1119	462.5	6	11	2000	2500	2000	2500
	X2B25U350	3500	2265	4171	4556	1604	1219	462.5	6	11	2000	2500	2000	2500
Wide view full free triplex mast	X2B25U370	3700	2415	4371	4756	1754	1369	462.5	6	11	2000	2500	2000	2500
	X2B25U400	4000	2615	4671	5056	1954	1569	462.5	6	11	2000	2500	2000	2500
	X2B25N400	4000	1930	4668	5046	1274	884	469.5	6	6	2000	2500	2000	2500
	X2B25N430	4300	2030	4968	5346	1374	984	469.5	6	6	1950	2400	1950	2500
	X2B25N450	4500	2080	5168	5546	1424	1034	469.5	6	6	1900	2300	1950	2450
	X2B25N470	4700	2180	5368	5746	1524	1134	469.5	6	6	1850	2250	1800	2450
	X2B25N500	5000	2280	5668	6046	1624	1234	469.5	3	6	1700	1900	1850	2400
	X2B25N550	5500	2430	6168	6546	1774	1384	469.5	3	6	1450	1600	1800	2050
	X2B25N600	6000	2630	6668	7046	1974	1584	469.5	3	6	1000	1050	1600	1750
	X2B25N650	6500	2830	7168	7546	2174	1784	469.5	3	6	/	/	1550	1550
X2B25N700	7000	3080	7668	8046	2424	2034	469.5	3	6	/	/	1200	1200	

Technical Data

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.									
	1.2	Manufacturer's type designation		CPCD15-X2H7F1/B1	CPCD18-X2H7F1/B1	CPCD20-X2H7F1/B1	CPCD25-X2H7F1/B1	CPCD30-X2H7F1/B1	CPCD35-X2H7F1/B1	CPCJ20-X2H7	CPCJ25-X2H7	CPCJ30-X2H7	CPCJ35-X2H7
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
	1.5	Rated capacity/rated load	Q (kg)	1500	1750	2000	2500	3000	3500	2000	2500	3000	3500
	1.6	Load centre distance	c (mm)	500	500	500	500	500	500	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x (mm)	405	410	462.5	462.5	477.5	482.5	462.5	462.5	477.5	482.5
		Rear overhang	mm	405	430	405	480	535	600	405	480	535	600
	1.9	Wheelbase	y (mm)	1475	1475	1650	1650	1700	1700	1650	1650	1700	1700
	Weight												
Tyres, chassis	2.1	Service Weight	kg	2750	2900	3455	3815	4400	4755	3455	3815	4400	4755
	2.2	Axle loading, laden front/rear	kg	3700/550	4110/540	4801/654	5543/772	6345/1055	7155/1100	4801/654	5543/772	6345/1055	7155/1100
	2.3	Axle loading, unladen front/rear	kg	1280/1470	1280/1620	1635/1820	1585/2230	1620/2780	1620/3135	1635/1820	1585/2230	1620/2780	1620/3135
	3.2	Tyre size, front		6.50-10-10 PR/2	6.50-10-10 PR/2	7.00-12-12PR/2	7.00-12-12PR/2	28×9-15-14PR/2	28×9-15-14PR/2	7.00-12-12PR/2	7.00-12-12PR/2	28×9-15-14PR/2	28×9-15-14PR/2
	3.3	Tyre size, rear		5.00-8-10PR/2	5.00-8-10PR/2	6.00-9-10PR/2	6.00-9-10PR/2	6.50-10-10PR/2	6.50-10-10PR/2	6.00-9-10PR/2	6.00-9-10PR/2	6.50-10-10PR/2	6.50-10-10PR/2
	3.6	Tread, front	b ₀ (mm)	920	920	965	965	1005	1005	965	965	1005	1005
	3.7	Tread, rear	b ₀ (mm)	940	940	973	973	975	975	973	973	975	975
	Dimensions												
	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/11	6/11	6/11	6/11	6/11	6/11	6/11	6/11	6/11	6/11
Performance data	4.2	Height, mast lowered	h ₀ (mm)	1995	1995	2015	2015	2040	2155	2015	2015	2040	2155
	4.3	Free lift	h ₂ (mm)	155	155	140	140	145	150	140	140	145	150
	4.4	Lift	h ₃ (mm)	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
	4.5	Height, mast extended	h ₄ (mm)	3958	3958	4046	4046	4145	4145	4046	4046	4145	4145
	4.7	Height of overhead guard (cabin)	h ₆ (mm)	2155	2155	2165	2165	2180	2180	2165	2165	2180	2180
	4.20	Length to face of forks	l ₂ (mm)	2285	2315	2517.5	2592.5	2712.5	2782.5	2517.5	2592.5	2712.5	2782.5
	4.21	Overall width	b ₁ (mm)	1110	1110	1155	1155	1225	1225	1155	1155	1225	1225
	4.22	Fork dimensions	s/e/l (mm)	920×100×35	920×100×35	1070×122×40	1070×122×40	1070×122×45	1070×122×50	1070×122×40	1070×122×40	1070×122×45	1070×122×50
	4.31	Ground clearance, laden, below mast	m ₁ (mm)	115	115	115	115	130	130	115	115	130	130
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)	150	150	150	150	165	165	150	150	165	165
	4.33	Aisle width for pallets 1000 x 1200 crossways	A ₀₁ (mm)	3595	3620	3822.5	3892.5	4027.5	4097.5	3822.5	3892.5	4027.5	4097.5
	4.34	Aisle width for pallets 800 x 1200 lengthways	A ₀₂ (mm)	3795	3820	4022.5	4092.5	4227.5	4297.5	4022.5	4092.5	4227.5	4297.5
	4.35	Turning radius	W ₀ (mm)	1990	2010	2160	2230	2350	2415	2160	2230	2350	2415
	5.1	Travel speed, laden/unladen	km/h	19/20	19/20	19/20	19/20	19/20	19/20	20/21	20/21	21/22	21/22
Combustion-engine	5.2	Lift speed, laden/unladen	m/s	0.62/0.68	0.62/0.68	0.62/0.66	0.62/0.66	0.54/0.57	0.44/0.47	0.62/0.66	0.62/0.66	0.54/0.57	0.44/0.47
	5.3	Lowering speed, laden/unladen	m/s	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50
	5.5	Drawbar pull, laden/unladen	N	14000/10000	14000/10000	23000/12500	23000/12500	24500/14000	24500/14000	22000/14000	22000/14000	26000/16000	26000/16000
	5.7	Gradeability, laden/unladen*	%	24/25	22/25	36/25	32/25	28/22	22/22	36/25	32/25	28/25	24/25
	7.1	Engine manufacturer/type		XINCHAI 3E22YG51P464			XINCHAI 3E22YG51			XINCHAI 3E22YG51			
		Emission STD		EU StageV	EU StageV	EU StageV	EU StageV	EU StageV	EU StageV	EU StageV	EU StageV	EU StageV	EU StageV
	7.2	Engine power according to DIN ISO 1585	kw	34	34	44.8	44.8	44.8	44.8	44.8	44.8	44.8	44.8
	7.3	Rated speed	min	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400
	7.4	Number of cylinders/displacement	(-)/(cm³)	3/2227	3/2227	3/2227	3/2227	3/2227	3/2227	3/2227	3/2227	3/2227	3/2227
Addition data	7.10	Battery voltage/nominal capacity	V/Ah	12/90	12/90	12/90	12/90	12/90	12/90	12/90	12/90	12/90	12/90
		Rated torque	N·m/r/min	150/1600-1800	150/1600-1800	210/1600-1800	210/1600-1800	210/1600-1800	210/1600-1800	210/1600-1800	210/1600-1800	210/1600-1800	210/1600-1800
		Bore × stroke	mm	94×107	94×107	94×107	94×107	94×107	94×107	94×107	94×107	94×107	94×107
		Transmissions Manufacturer		CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA	CHINA	CHINA	CHINA
		Transmissions Type		Power shift	Power shift	Power shift	Power shift	Power shift	Power shift	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
		Stage FWD/RVS		1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1
	10.1	Operating pressure for attachments	bar	160	160	160	160	160	160	160	160	160	160
	10.4	Fuel tank capacity	liter	50	50	58	58	60	60	58	58	60	60

Note： *With suspension seat or cabin
*As a calculated value

Technical Data

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.					
	1.2	Manufacturer's type designation		CPQYD15-X2H24F1/B1	CPQYD18-X2H24F1/B1	CPQYD20-X2H22F1/B1	CPQYD25-X2H22F1/B1	CPQYD30-X2H22F1/B1	CPQYD35-X2H22F1/B1
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		LPG/GAS	LPG/GAS	LPG/GAS	LPG/GAS	LPG/GAS	LPG/GAS
	1.5	Rated capacity/rated load	Q (kg)	1500	1750	2000	2500	3000	3500
	1.6	Load centre distance	c (mm)	500	500	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x (mm)	405	410	462.5	462.5	477.5	482.5
		Rear overhang	mm	405	430	405	480	535	600
	1.9	Wheelbase	y (mm)	1475	1475	1650	1650	1700	1700
Weight	2.1	Service Weight	kg	2750	2900	3455	3815	4400	4755
	2.2	Axle loading, laden front/rear	kg	3700/550	4110/540	4801/654	5543/772	6345/1055	7155/1100
	2.3	Axle loading, unladen front/rear	kg	1280/1470	1280/1620	1635/1820	1585/2230	1620/2780	1620/3135
Tyres, chassis	3.2	Tyre size, front		6.50-10-10 PR/2	6.50-10-10 PR/2	7.00-12-12PR/2	7.00-12-12PR/2	28×9-15-14PR/2	28×9-15-14PR/2
	3.3	Tyre size, rear		5.00-8-10PR/2	5.00-8-10PR/2	6.00-9-10PR/2	6.00-9-10PR/2	6.50-10-10PR/2	6.50-10-10PR/2
	3.6	Tread, front	b ₀ (mm)	920	920	965	965	1005	1005
	3.7	Tread, rear	b ₀ (mm)	940	940	973	973	975	975
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/11	6/11	6/11	6/11	6/11	6/11
	4.2	Height, mast lowered	h ₀ (mm)	1995	1995	2015	2015	2040	2155
	4.3	Free lift	h ₂ (mm)	155	155	140	140	145	150
	4.4	Lift	h ₃ (mm)	3000	3000	3000	3000	3000	3000
	4.5	Height, mast extended	h ₄ (mm)	3958	3958	4046	4046	4145	4145
	4.7	Height of overhead guard (cabin)	h ₆ (mm)	2155	2155	2165	2165	2180	2180
	4.20	Length to face of forks	l ₂ (mm)	2285	2315	2517.5	2592.5	2712.5	2782.5
	4.21	Overall width	b ₁ (mm)	1110	1110	1155	1155	1225	1225
	4.22	Fork dimensions	s/e/l (mm)	920×100×35	920×100×35	1070×122×40	1070×122×40	1070×122×45	1070×122×50
	4.31	Ground clearance, laden, below mast	m ₁ (mm)	115	115	115	115	130	130
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)	150	150	150	150	165	165
	4.33	Aisle width for pallets 1000 x 1200 crossways	A ₀₁ (mm)	3595	3620	3822.5	3892.5	4027.5	4097.5
	4.34	Aisle width for pallets 800 x 1200 lengthways	A ₀₂ (mm)	3795	3820	4022.5	4092.5	4227.5	4297.5
	4.35	Turning radius	W ₀ (mm)	1990	2010	2160	2230	2350	2415
Performance data	5.1	Travel speed, laden/unladen	km/h	20/21	20/21	20/21	20/21	19/20	19/20
	5.2	Lift speed, laden/unladen	m/s	0.65/0.68	0.65/0.68	0.65/0.68	0.65/0.68	0.55/0.58	0.45/0.48
	5.3	Lowering speed, laden/unladen	m/s	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50
	5.5	Drawbar pull, laden/unladen	N	15600/10000	15600/10000	18300/12500	18300/12500	19300/14000	19300/14000
	5.7	Gradeability, laden/unladen*	%	24/25	22/25	23/25	20/25	20/22	20/22
Combustion-engine	7.1	Engine manufacturer/type		GCT GK21 DUAL	GCT GK21 DUAL	GCT GK25 DUAL	GCT GK25 DUAL	GCT GK25 DUAL	GCT GK25 DUAL
		Emission STD		CARB Tier3/ EPA Tier2/ EU StageV					
	7.2	Engine power according to DIN ISO 1585	kw	LP: 40/G: 39	LP: 40/G: 39	LP: 46/G: 45	LP: 46/G: 45	LP: 46/G: 45	LP: 46/G: 45
	7.3	Rated speed	min	2700	2700	2700	2700	2700	2700
	7.4	Number of cylinders/displacement	(-)/(cm³)	4/2065	4/2065	4/2488	4/2488	4/2488	4/2488
	7.10	Battery voltage/nominal capacity	V/Ah	12/60	12/60	12/60	12/60	12/60	12/60
		Rated torque	N·m/r/min	LP: 149/2000/G: 148/2000	LP: 149/2000/G: 148/2000	LP: 186/2000/G: 175/2000	LP: 186/2000/G: 175/2000	LP: 186/2000/G: 175/2000	LP: 186/2000/G: 175/2000
		Bore × stroke	mm	89×83	89×83	89×100	89×100	89×100	89×100
		Transmissions Manufacturer		CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA	CHINA/OKAMURA
		Transmissions Type		Power shift	Power shift	Power shift	Power shift	Power shift	Power shift
Addition data		Stage FWD/RVS		1/1	1/1	1/1	1/1	1/1	1/1
	10.1	Operating pressure for attachments	bar	160	160	160	160	160	160
	10.4	Fuel tank capacity	liter	LP: 35/G: 50	LP: 35/G: 50	LP: 35/G: 50	LP: 35/G: 50	LP: 35/G: 50	LP: 35/G: 50

Note： *With suspension seat or cabin
*As a calculated value

Optional Engine

Engine	Engine manufacturer/type			XINCHAI/ 3E22Y651P464	XINCHAI/ 3E22Y651	GCT/GK21 LPG	GCT/GK21 DUAL	GCT/GK25 LPG	GCT/GK25 DUAL	KUBOTA/V2607-CR-E5B	GCT/GK25
	Manufacturer's type designation			H7	H7	H23	H24	H21	H22	W97	W22
	Drive			Diesel	Diesel	LPG	DUAL(GAS/LPG)	LPG	DUAL(GAS/LPG)	Diesel	DUAL(GAS/LPG)
	Emission STD			EU StageV	EU StageV	CARB SIP LSI-1/EPA Tier2/StageV	CARB SIP LSI-1/EPA Tier2/StageV	CARB SIP LSI-1/EPA Tier2/Stage V	CARB SIP LSI-1/EPA Tier2/Stage V	Stage V/Tier 4f	—
	Engine power		KW/r/min	34/2400	44.8/2400	43/2700	GAS: 40/2700 LP6: 43/2700	47/2700	GAS: 44.5/2700 LP6: 47/2700	38/2400	37.4/2300
	Rated torque		N·m/r/min	150/1600-1800	210/1600-1800	161/1800	GAS: 153/1800 LP6: 161/1800	190/1600	GAS: 175/1600 LP6: 190/1600	174.1/1500	176.5/1600
	Number of cylinders/displacement		ml	3/2227	3/2227	4/2065	4/2065	4/2488	4/2488	4/2615	4/2488
Transmission	Powershift	F	F1	✓	✓	✓	✓	✓	✓	✓	✓
		OKAMURA	B1	✓	✓	✓	✓	✓	✓	✓	✓
Rated capacity/rated load			Q (kg)	1500-1800	2000-3500	1500-1800	1500-1800	2000-3500	2000-3500	1500-3500	2000-3500

